



HAND PALLET TRUCK SCALE MPTS

- Hygienic innovative design
- Aggressive environments resistant chassis
- Robust and durable structure
- Easy to handle
- Maximum stability
- Quiet

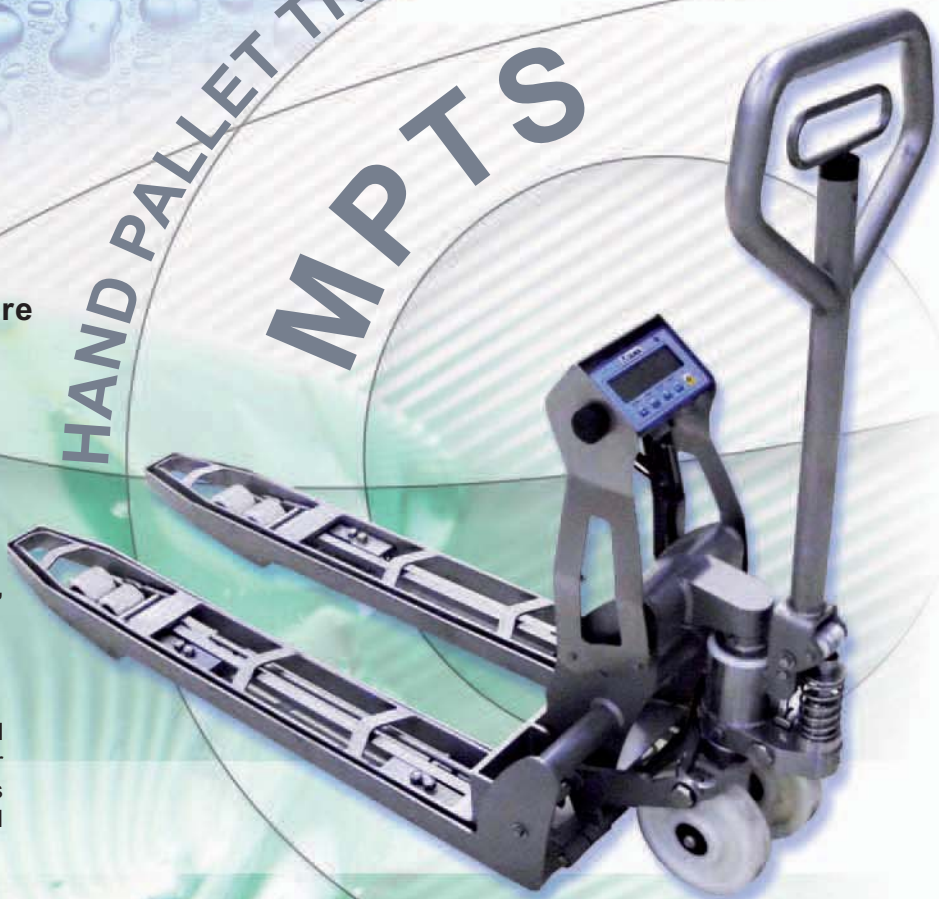

The innovative and patented hygienic design of the new ULMA Inoxtruck Hand Pallet Truck Scale, ensures a lower microbiological contamination risk, guaranteeing strict hygiene compliance in the high demanding area of the food industry.

The MPTS Series of Hand pallet trucks with Integrated Weighing System, provide a precise measurement for checking weights at goods reception and shipping, thanks to the four weighing cell technology. The stainless steel load cells mounted on the push rods are protected by an outside frame against possible shocks, avoiding callibration errors.

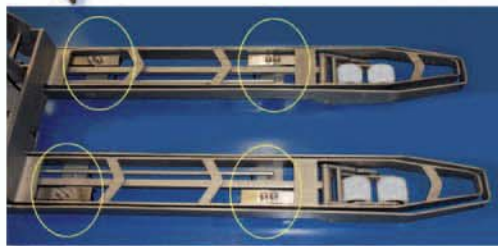

With cables
Without chains



Sealed bearings



No grease fittings

PERFORMANCE CHARACTERISTICS

- 1000 kg. weighing capacity
- Measuring range from 0 up to 1000 kg. in 0,1% steps
- High accuracy: Maximum 0,1% deviation from measuring range.
- IP 68 protected Stainless Steel Cells
- IP65 protected Display

- Automatic zero adjustment
- Plug-in battery module with 12V / 0,5Ah incl. charger (maximum charge time is 12h)
- 60h operating time
- Automatic swich-off (programmable)
- RS232

OPTIONS

- Printer
- Low Battery Warning
- USB
- Bluetooth
- EX-Proof Protection
- Certificate Option (CLASS III)

FOOD INDUSTRY



Characteristics			
1.1	Manufacturer (Abbreviation)		ULMA Inoxtruck
1.2	Manufacturer's model designation		MPT10S
1.4	Operator type: manual, pedestrian, operator standing, seated		Manual Scale
1.5	Load capacity	Q	kg 1000
1.6	Load center distance	c	mm 600
1.8	Load wheel axle fork face (forks lowered)	x	mm 921
1.9	Wheelbase	y	mm 1212
1.10	Chassis		AISI 304L
1.11	Sheet		AISI 304L
Weight			
2.1	Truck weight with nominal load		kg 1105
2.2	Axle loadings with nominal load		kg 414 / 1081
2.3	Axle loadings without load		kg 65 / 40
Wheels and Drive Train			
3.1	Tyres: PT=Polyurethane, PA=Polyamide (nylon), Vul=Vulkollan, drive/load side		PA/PA
3.2	Tyre dimensions, drive side		200 X 50
3.3	Tyre dimensions, load side		80 X 67
3.5	Number of wheels, drive/load side (x=driven)		2 / 2
3.6	Track width (center of tyres), drive side	b10	mm 138
3.7	Track width (center of tyres), load side	b11	mm 360
Dimensions			
4.4	Lift height	h3	mm 120
4.9	Height of tiller arm (minimum/maximum)	h14	mm 1230
4.15	Fork height, fully lowered	h13	mm 95
4.19	Overall length	l1	mm 1660
4.20	Length to fork face (includes fork thickness)	l2	mm 450
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm 60 / 160 / 1210
4.25	Outside width over forks	b5	mm 520
4.32	Ground clearance at center of wheelbase (forks lowered)	m2	mm 30
4.34a	Working aisle width (Ast) 800 x 1200mm pallets, load lengthwise	Ast	mm 2060
4.34b	Working aisle width (Ast) 1000 x 1200mm pallets, load crosswise	Ast	mm 2175
4.35	Turning circle radius	Wa	mm 1380

ULMA Inoxtruck's products are constantly improving. Because of this, some materials, options and specifications can be changed without previous notification.

Options

- Vulkollan wheels
- Stainless steel AISI 316L
- Different length and width at forks available
- Tandem load Wheel
- Special 300mm lift height
- Entry Exit Roller
- Splash proof protection

